

# ABSTRACT


A thermoplastic resin composition comprising 5 to 50 parts by weight of a liquid crystal polyester resin containing at least one selected from the following structural units (1) to (4) and having a flow initiation temperature of 260°C or less, and 100 parts by weight of a thermoplastic resin having a deflection temperature under load of less than 190°C:

a structural unit (1) containing the following structural formulae (A<sub>1</sub>), (B<sub>2</sub>) and (C<sub>1</sub>),


a structural unit (2) containing the following structural formulae (A<sub>1</sub>), (B<sub>1</sub>), (B<sub>2</sub>) and (C<sub>1</sub>),

a structural unit (3) containing the following structural formulae (A<sub>1</sub>), (B<sub>1</sub>), (B<sub>2</sub>) and (C<sub>2</sub>), and


a structural unit (4) containing the following structural formulae (A<sub>1</sub>), (B<sub>1</sub>), (B<sub>2</sub>), (C<sub>1</sub>) and (C<sub>2</sub>):

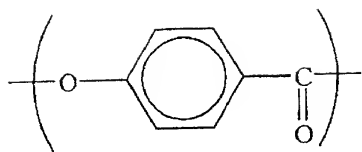


(A<sub>1</sub>)

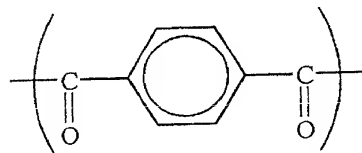


(B<sub>1</sub>)

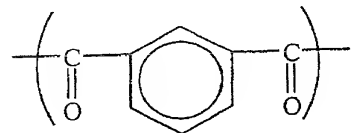

(B<sub>2</sub>)

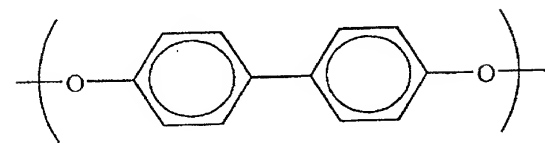

(C<sub>1</sub>)

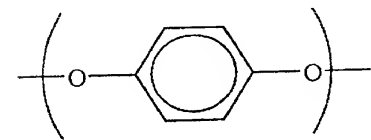

(C<sub>2</sub>)